



# "ANGEL TOP" by RAE

## A PATTERN FOR KNITS!

MEASURE YOU  
(or a well-fitting tee)

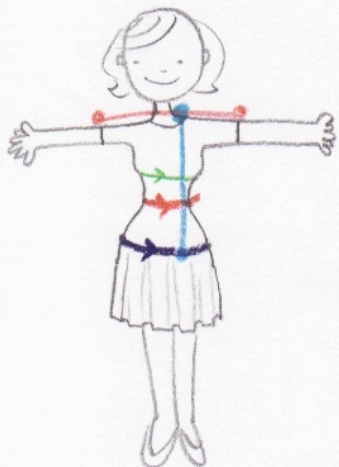

MAKE PATTERN  
ON A LARGE PC OF PAPER,  
NEWSPRINT, OR ART ROLL

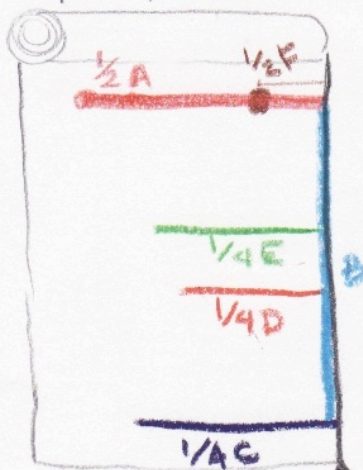

USING THE MEASUREMENTS YOU TOOK:


- (A) Draw a line  $\perp$  to center,  $\frac{1}{2}A$  long.
- (B) Measure down  $B$  distance
- (C) and draw  $\frac{1}{4}C$  parallel to line  $A$ .
- (D) Draw  $\frac{1}{4}D$  in from center, about  $\frac{2}{3}$  of the way down \*
- (E) Draw  $\frac{1}{4}E$  in from center, about  $\frac{1}{3}$  of the way down \*\*
- (F) Make a mark along line  $A$ ,  $\frac{1}{2}F$  distance from center

- (A) Measure across from sleeve edge to sleeve edge, then add 2" = A
- (B) Measure <sup>from</sup> where neck meets shoulder down to hip
- (C) Measure hip (+ divide by 4!)
- (D) Measure waist (+ divide by 4!)
- (E) Measure chest right below bust (+ divide by 4!)

\* ] When measuring B.  
\*\* ] You may want to take note of where D + E fall along that line.  
\* Mine was 15" down  
\*\* Mine was 10" down.


(F) also: measure across the neckhole width of a shirt or tank you like

FINISH PATTERN

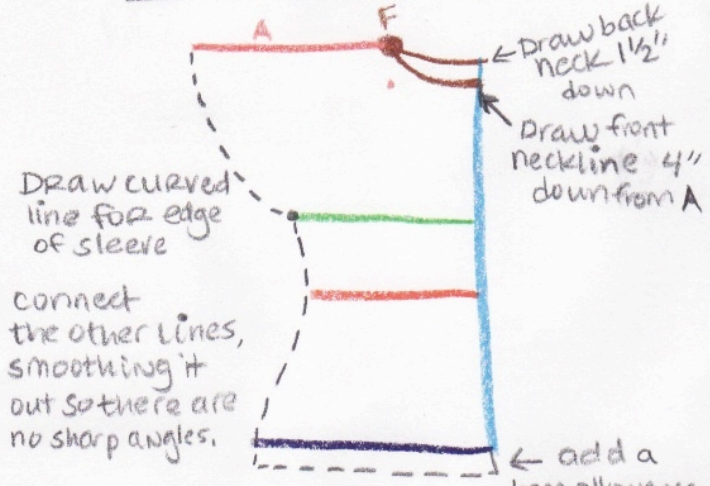

NOTE: I don't usually add seam allowance because knits stretch a lot and my SA =  $\frac{1}{4}$ "

CUT OUT FABRIC

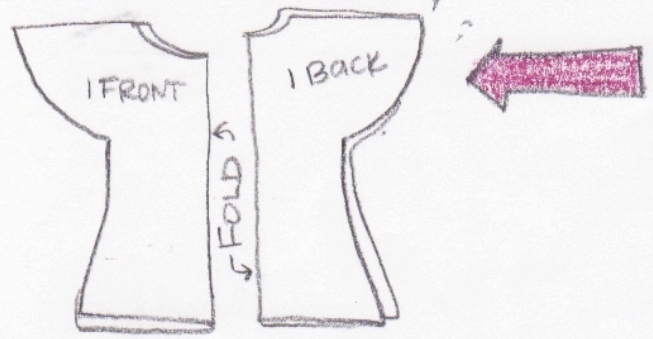


cut 1 front and one back on the fold.




Pg 2, Rae's Angel Top


CONSTRUCT TOP

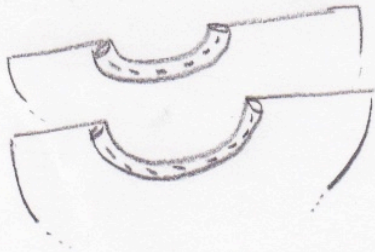

- ① Fold under  $\frac{1}{4}$ " twice along necklines + stitch down  
(Fold toward wrong side)

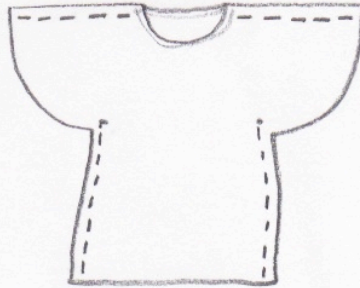


- ② Sew shoulder seams + side seams with  $\frac{1}{4}$ " seam allowance.  
(End side seams at arm pits)



- ③ Clip corners in about  $\frac{1}{2}$ " at arm pits



- ④ Fold under  $\frac{1}{4}$ " twice along sleeve edges toward wrong side and sew down

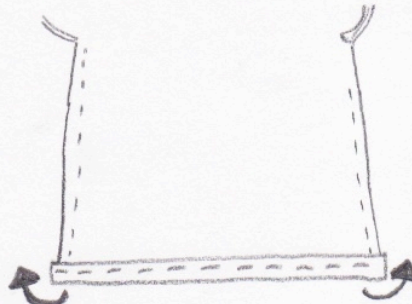

- ⑤ Fold under amount of hem allowance at bottom and sew down.

HINTS:

- use stretch needle
- use good machine
- use long-ish stitch length.